


Roof foot 30x30cm SRF-300 with pad

Střešní pata 30x30cm SRF-300 s podložkou

TDS3x001

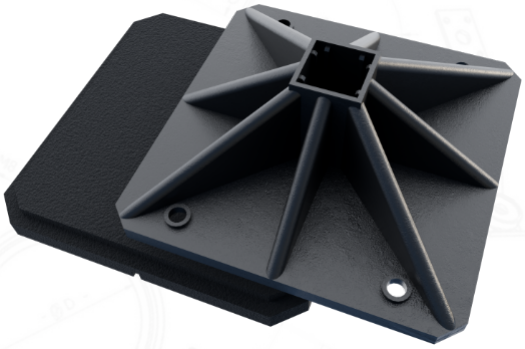

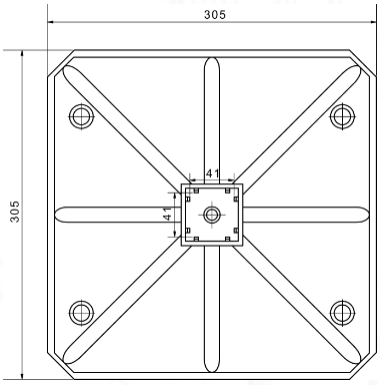

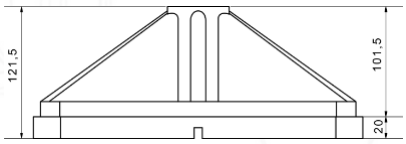

Vlastnosti a výhody

- pouze pro profily rozměru ST 41x41
- použití na venkovní instalace pro klimatizační jednotky, vzduchotechnické jednotky, potrubí
- odolný vůči UV záření dle ISO 4892-3:2016
- modulární design umožňuje přizpůsobení systému různým typům střešních zařízení a rychlou montáž
- **délka konce usazeného nosníku v patě musí činit 80 mm**

- provozní teplota -30 °C až +80 °C
- max. zatížení na patu 175 kg
- složení: pata - 30 % nylon plněný sklem s přiloženou gumovou protivibrační podložkou - recyklovaný SBR styren-butadienový kaučuk


- obsah balení:
  - střešní pata
  - antivibrační podložka


Features and benefits


- only for profiles measuring ST 41x41
- for outdoor installation of air conditioning units, ventilation units, and ductwork
- UV resistant according to ISO 4892-3:2016
- modular design allows the system to be adapted to different types of roof equipment and quick installation
- **the length of the end of the settled profile at the foot must be 80 mm**

- operating temperature -30 °C to +80 °C
- max. load per foot: 175 kg
- composition: foot - 30% glass-filled nylon with attached rubber anti-vibration pad - recycled SBR styrene-butadiene rubber

- package contents:
  - roof foot
  - anti-vibration pad

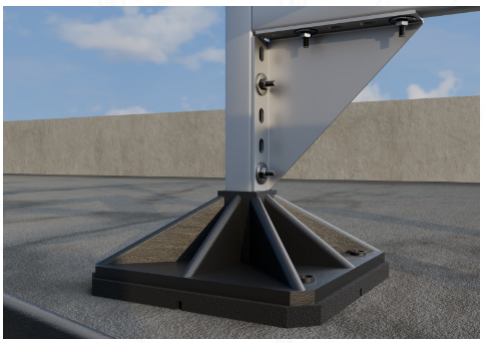

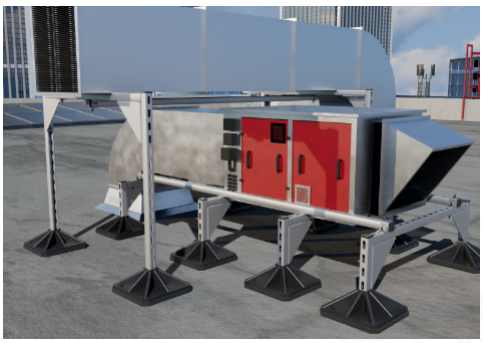

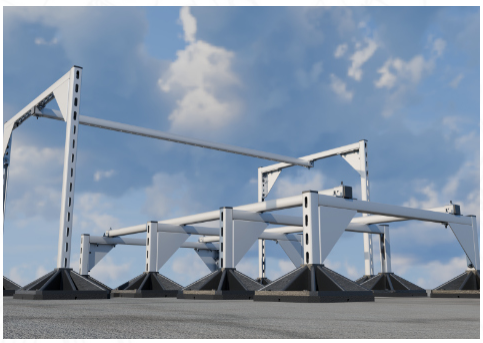

Návod k instalaci

Installation Instructions

CZ/EN05/2025 – Technické změny vyhrazeny / Subject to change without notice